AD-A100 700

NAVAL OCEAN SYSTEMS CENTER SAN DIEGO CA
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
OCT 79 N G CERUTI
NOSC/TR-470

NL

Line 1
ACCOUNTY

REND
SANTE
THE SAN DIEGO CA
F/G 20/6
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SANTE
THE SAN DIEGO CA
F/G 20/6
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SANTE
THE SAN DIEGO CA
F/G 20/6
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SANTE
THE SAN DIEGO CA
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SANTE
THE SAN DIEGO CA
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SANTE
THE SAN DIEGO CA
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SANTE
THE SAN DIEGO CA
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SAN DIEGO CA
THE SAN DIEGO CA
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SAN DIEGO CA
THE SAN DIEGO CA
DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LU--ETC(U)
NL

END
SAN DIEGO CA
THE SAN DIEGO CA



NOSC TR 470

Technical Report 470

DETERMINATION OF INTEGRATED OPTICAL THICKNESS OF CLOUDS FROM LUNAR IRRADIANCE MEASUREMENTS

MG Ceruti

NOSC TR 470

15 October 1979

Final Report: 15 June - 15 October 1979

IC FILE COPY

Approved for public release; distribution unlimited

NAVAL OCEAN SYSTEMS CENTER SAN DIEGO, CALIFORNIA 92152



NAVAL OCEAN SYSTEMS CENTER, SAN DIEGO, CA 92152

AN ACTIVITY OF THE NAVAL MATERIAL COMMAND

SL GUILLE, CAPT, USN

HL BLOOD

Commander

Technical Director

ADMINISTRATIVE INFORMATION

This report was prepared by the author while working for Code 8114, Naval Ocean Systems Center, San Diego, CA under NOSC CM06, 11402 N, XO 793-SB. This project was initiated and supported by the efforts of Dr MB White of the Office of Naval Research, Boston, MA and by CDR T Wiener and Dr S Karp of DARPA STO, Washington, D.C. Gratitude is also extended to blue-green cloud propagation project manager, KJ Kelley, and to LB Stotts, Dr GC Mooradian, Dr M Geller, DH Stephens, Dr RP Bocker, RD Anderson, RF Howarth, R Krautwald, and R Reyes of the Naval Ocean Systems Center.

Released by MS Kvigne, Head Communications Research and Technology Division Under authority of HD Smith, Head Communications Systems and Technology Department SECURITY CLASSIFICATION OF THIS PAGE (When Date Entered)

NOSC Technical Report 470 (TR 470)	BEFORE COMPLETING FORM
NOSC Technical Report 470 (TR 470)	3. RECIPIENT'S CATALOG NUMBER
	19.6
4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
DETERMINATION OF INTEGRATED OPTICAL THICKNESS	Final Reports
OF CLOUDS FROM LUNAR IRRADIANCE MEASUREMENTS	15 June – 15 October 1979
* ** ** ** ** ** ** ** ** ** ** ** ** *	PERFORMING ORG. REPORT NUMBER
·	8. CONTRACT OR GRANT NUMBER(*)
7 AUTHOR(s)	B. CONTRACT OR GRANT NUMBER(*)
MG Ceruti	,
	(16)
4.5.440.400.655	10 PROGRAM EL EMENT PROTECT TASK
9 PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK WAIT NUMBERS
Naval Ocean Systems Center	CM06, 11402 N, XO 793-SB
San Diego, CA 92152	(1100,1110211,101100)
	12 REPORT DATE
11 CONTROLLING OFFICE NAME AND ADDRESS	1
Naval Ocean Systems Center	15 October 1979
San Diego, CA 92152	44
14 MONITORING AGENCY NAME & ADDRESS(II different from Controlling Office)	15. SECURITY CLASS. (of this toport)
	,
14 1 6 1 1911 9 1 1 1 1 1 1 1 1 1	Unclassified
	15# DECLASSIFICATION DOWNGRADING
	SCHEDULE
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different fr	om Report)
18 SUPPLEMENTARY NOTES	
	0
9 KEY WORDS (Continue on reverse side if necessary and identify by block number	e)
	•)
19 KEY WORDS (Continue on reverse side if necessary and identity by block number Blue-green laser	•)
19 KEY WORDS (Continue on reverse side if necessary and identity by block number Blue-green laser Clouds	
Blue-green laser Clouds Lunar irradiance Optical communication	Trac
SEY WORDS (Continue on reverse side if necessary and identify by block number Blue-green laser Clouds Lunar irradiance Optical communication Optical thickness ABSTRACT (Continue on reverse side if necessary and identify by block number	Tau
Blue-green laser Clouds Lunar irradiance Optical communication Optical thickness A procedure is suggested to obtain the effective optical thickness/ransmission of moonlight both with and without cloud cover. The optical thickness is calculated from the transmission using a the stream of the st	Tof clouds by measuring the atmospheric neory of RE Damelson, DR Moore and nosph. Sci., 26, 1078 (1969)), later for Communications Through Thick Clouds, view receiver to measure the irradiance, Therefore, this method of cloud optical
Blue-green laser Clouds Lunar irradiance Optical communication Optical thickness Optical thickness A procedure is suggested to obtain the effective optical thickness (ransmission of moonlight both with and without cloud cover. The optical thickness is calculated from the transmission using a the control of the contro	Tof clouds by measuring the atmospheric neory of RE Damelson, DR Moore and nosph. Sci., 26, 1078 (1969)), later for Communications Through Thick Clouds, view receiver to measure the irradiance, Therefore, this method of cloud optical

39511

CONTENTS

LUNAR IRRADIANCE MEASUREMENTS . . . PAGE 3

Background . . . 3
Technical Introduction . . . 3

THEORY OF OPTICAL THICKNESS DETERMINATION USING LUNAR IRRADIANCE MEASUREMENTS . . . 5

MEASUREMENT PROCEDURE . . . 6

EQUIPMENT CONFIGURATION . . . 6

DATA REDUCTION . . . 9

FINDINGS . . . 11

RECOMMENDATIONS . . . 11

REFERENCES . . . 34

APPENDIX A: Correction for Using a 45° Angle Field of View Limiter With a Lambertian Receiver . . . 36

APPENDIX B: Memorandum from NOSC to SETC file, "Zenith Angle Dependence of Thick Cloud Transmittance," 22 Jan 79 . . . 39

ILLUSTRATIONS

- Geometry of experiment . . . page 7
- 2. Experimental apparatus . . . 8



LUNAR IRRADIANCE MEASUREMENTS

BACKGROUND

One of the most serious problems facing the Navy today is that of transferring information to submarines without affecting their operational capabilities. Ideally, such a communications connectivity should be available at all operating speeds and depths, and should not require any external receiver which would compromise the submarine's strategic or tactical function. Until recently, most attempts at solving this problem have focused on systems that use the lower end of the electromagnetic spectrum for transmission of the desired information (ie, elf, vlf, etc). The advent of high power ultraviolet-visible lasers has changed this spectral emphasis to include optical frequencies. In particular, the Navy and the Defense Advanced Research Projects Agency have been jointly investigating the possibility of an optical solution for strategic communications. The intent has been to assess the practicality and suitability of optical technology to solve the strategic communications problem. The approach involves detailed analyses and experimentation in the areas of optical engineering, channel characterizations, and critical component technology development. 1,2 One of the investigations pursued in the channel characterization portion of the program was on the effect of clouds on short-pulse, optical plane-wave propagation through the atmos-This report describes results obtained during one aspect of that investigation. More specifically, a partial set of inferred integrated optical thickness values derived from lunar irradiance measurements of the laser-illuminated cloud layer used in the Downlink Laser Cloud Propagation Experiment performed in Kauai, Hawaii, during August and September 1979 is reported. 2,3

TECHNICAL INTRODUCTION

When a plane wave laser pulse is incident on a thick, plane-parallel cloud layer, the resultant pulse is severely degraded relative to the incident illumination profile because of the multiple scattering which occurs within the cloud. In more certain terms, an initial narrow pulse plane wave will exit the cloud layer decollimated and attenuated, with the incident pulse

^{1.} Karp, S, A Test Plan for Determining the Feasibility of Optical Satellite Communications Through Clouds at Visible Frequencies, NOSC TN 279, 1 July 1978.

^{2.} Technical Advisor to the Strategic Rlue-Green Optical Communications Program Joint Coordinating Committee, Naval Rlue-Green Single Pulse Downlink Propagation Model, NOSC TR 387, Jan 1979.

^{3.} Technical Advisor to the Strategic Blue-Green Optical Communications Program Joint Coordinating Committee, Strategic Blue-Green Optical Communications Program Plan, NOSC Technical Document 269, 16 July 1979.

^{4.} Hostetter, GR, Test Plan May 1, 1979 Downlink Laser Cloud Experiment, Contract #N00014-78-C-0716, GTE Sylvania, Inc.

shape greatly lengthened and discreted. 5,6 The magnitude of these effects depends on the cloud layer's physical thickness, optical thickness, solar phase function and rms scatter angle (or, conversely, the average cosine of scattering). 2,7,8 Several analytical and Monte Carlo based 7,19,20 treatments of all or part of the above exist in the literature. Many of the above have been used in the Navy Single Pulse Downlink Propagation Model to simulate the channel effects incurred by both the ground-based and space-based laser communications concepts being pursued in the Strategic Blue-Green

^{5.} Statts, LB, Closed Form Expression for Optical Pulse Broadening in Multiple-Scattering Media, Applied Optics, 17, No. 4,504 (1978).

^{6.} Dell-Imagine, RA, A Study of Multiple Scattering of Optical Radiation with Application to Laser Communications, in Advances in Communication Systems, vol II, edited by VA Balakrishnar (Academic, New York, 1966). p 1.

^{7.} Danielson, RE, Moore, DR, and van de Hulst, HC, The Transfer of Visible Radiation Through Clouds, J. Atmosph. Sci., 26, 1078 (1969).

^{8.} Mooradian, GC, Geller, M, Stotts, LB, Stephens, DH, and Krautwald, RA, Blue-Green Pulsed Propagation Through Fog, Applied Optics, 18, No. 4, pp 429-441 (1979).

^{9.} Heggestad, HM, Optical Communication Through Multiple Scattering Media, M.I.T. Technical Report No. 472, 22 November 1978 (unpublished).

^{10.} Bravo-Zhivotovskiy, DM, Dolin, LS, Luchmin, AG, and Sarelyev, VA, Structure of a Narrow Light Beam in Sea Water, Atmospheric and Oceanic Physics, 5, No. 2, p 160-167 (1969) (translated by PA Kaehn).

^{11.} Arnush, D, Underwater Light-Beam Propagation in the Small-Angle-Scattering Approximation, J. Opt. Soc. Am. 62, No. 9, 1109 (1972).

^{12.} Fante, RL, Propagation of Electromagnetic Waves Through Turbulent Plasma Using Transport Theory, IEEE Trans Antenna Propagation, AP-21, pp 750-755 (1973).

^{13.} Ishimaru, A, and Hong, ST, Multiple Scattering Effects on Coherent Bandwidth and Pulse Distortion of a Wave Propagating in a Random Distribution of Particles, Radio Sci. 10, 637 (1975).

^{14.} Hong, ST, and Ishimaru, A, Two Frequency Mutual Coherence Function, Coherence Randwidth, and Coherence Time of Millimeter and Optical Waves in Rain, Fog, and Turbulence, Radio Sci. 11, No. 6,501 (1976).

^{15.} Stotts, LB, The Radiance Produced by Laser Radiation Traversing a Particulate Multiple-Scattering Medium, J. Opt. Scc. Am., 67, No. 6, p 815-19 (1977).

^{16.} Ishimaru, A, Theory and Application of Wave Propagation and Scattering in Random Media, Proceedings of IEEE, 65, No. 7, p 1030-61 (1977).

^{17.} Fried, DL, Propagation of the Mutual Coherence Function for an Infinite Plane Wave Through a Turbid Medium, Optics Letters, 1, No. 3, p 104-6 (1977).

^{18.} Lutomirski, RF, Atmospheric Degradation of Electro-Optical System Performance, Applied Optics, 17, No. 24, p 3915-21 (1978).

^{19.} Plass, GN, and Kattawar, GW, Monte Carlo Calculations of Light Scattering from Clouds, Applied Optics, 7, No. 3, p 415-15 (1968).

^{20.} Bucher, EA, Propagation Models for Optical Communications Through Fog and Clouds, Proceedings of the National Electronic Conference, vol 29, p 180-185 (1974).

Optical Communications Program. Unfortunately, none of the above have been experimentally verified. Hence, a technical uncertainty exists in any performance estimate produced in the system engineering portion of that program.

To reduce this uncertainty, the program's Joint Coordinating Committee initiated an experimental effort ^{3,4} to measure the transmission and multipath time spread incurred when traversing actual atmospheric clouds. ³ The participants involved in the experiment were GTE Sylvania; HSS, Inc.; and the Naval Ocean Systems Center (NOSC), with NOSC responsible for the meteorological characterization portion of the experiment. Because of the importance and magnitude of the experiments, NOSC felt that an alternative characterization of a cloud layer's optical thickness was desirable and that, since inhomogeneities in the cloud layers were anticipated, an integrated optical thickness characterization technique should be employed.

Gary Lee, et al, of McDonnell Douglas Corp. suggested that a method using measured solar radiance levels could be used to infer the cloud's integrated optical thickness. (See reference 1, appendix B.) This procedure is general enough to apply to lunar irradiance as well, if lunar properties such as moon phase, and earth-moon distance are accounted for. The author was tasked to design the experiment, perform the on-site measurements, reduce the data, and document the findings. This report provides that documentation.

THEORY OF OPTICAL THICKNESS DETERMINATION USING LUNAR IRRADIANCE MEASUREMENTS

The amount of radiant energy flux from the moon, as measured on a flat horizontal surface, depends on the following factors:

- 1. Moon phase; a full moon yields the most light. 21,22
- 2. The angle of the moon's position relative to the zenith; maximum brightness is observed when the moon is directly overhead. 21,22
- 3. The earth/moon distance; the light flux is the most intense at lunar perigee. 22
- 4. The matter in the lunar path between the moon and the detector, such as particulate scattering from absorption and clouds. Variation of absorption and scattering due to atmospheric changes is to be constant throughout the time the lunar irradiance measurements are taken.

^{21.} Biberman, LM, Dunkelman, L, Fickett, ML, and Finke, RG, Levels of Nocturnal Illumination, Appendix by D. R. E. Brown, Institute for Defense Analysis Research, copy 109/200, Contract SO-50, Task T-36.

^{22.} Bond, DS, and Henderson, FP, The Conquest of Darkness, AD 346297, Defense Documentation Center, Alexandria, VA, July 1963.

Measurement of the lunar irradiance with a clear sky and measurement of the lunar irradiance with clouds in the light path can be used to determine the scattering and absorption due to clouds if the moon's phase, the moon's position, and earth/moon distance are properly accounted for. The difference between these two irradiance measurements is the essence of the experiment. An in depth discussion of the theory and method are presented in reference 1.

The chief advantage of this method of determining optical thickness is that a spatially averaged value of irradiance is obtained. Thus, if the receiver field of view contained some patchy clouds and some clear sky, the value of irradiance observed would be approximately equal to what one would see if the visible cloud material (of sufficient thickness) had been equally distributed over the entire field of view. This will not work for clouds whose optical thickness is less than about 20, because the method relies on the van de Hulst equation to derive t from a transmission value.

MEASUREMENT PROCEDURE

Values of lunar irradiance were obtained utilizing the following procedure:

The irradiance receiver was mounted on a tripod, exposed to the lunar sky with a zenith orientation. Values of lunar irradiance were monitored at various times throughout the night, as was the position of the moon at the time of each measurement. The values obtained were used in conjunction with the theory to normalize the observed irradiance measurements for cloudy conditions relative to those taken under clear sky conditions.


Simultaneous with the lunar irradiance measurements were measurements of direct laser pulse propagation through clouds. The laser was mounted on an aircraft and pulsed at 10 Hz. The aircraft was flown above the clouds and over the test site. The position of the aircraft was monitored continuously throughout the aircraft fly bys.

Figure 1 indicates the geometry of both the aircraft laser and the lunar irradiance measurements. The laser beam was spread upon exit from the aircraft and further dispersed by the clouds so that any laser light indicating the irradiance receiver was negligible and not detectable above the moonlight background.

Measurements were taken for the laser experiment during the last week of August and the first three weeks of September 1979. Lunar irradiance measurements were made between 5 September and 12 September 1979. These experiments were conducted simultaneously on the Island of Kauai on Hawaii.

EQUIPMENT CONFIGURATION

The irradiance receiver consisted of an RCA 4517 photomultiplier tube, a high-voltage power supply, and a preamplifier buffer mounted in a waterproof

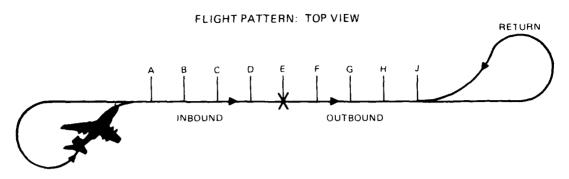

KEY TO LASER POSITION

×	TEST SITE	E	-	DIRECTLY OVER THE SITE
A	15 000 YARDS INBOUND FROM SITE	F	-	5000 YARDS OUTBOUND FROM SITE
В	10 000 YARDS INBOUND FROM SITE	G	-	7500 YARDS OUTBOUND FROM SITE
С	7500 YARDS INBOUND FROM SITE	Н	-	10 000 YARDS OUTBOUND FROM SITE
D	5000 YARDS INROUND FROM SITE	J	_	15 000 YARDS OUTBOUND FROM SITE

SIDE VIEW

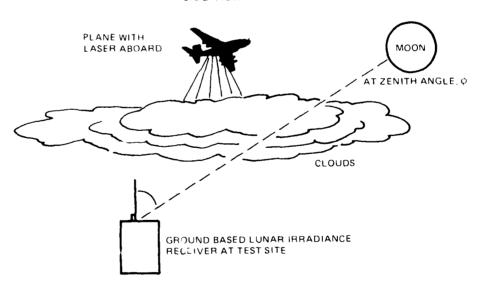


Figure 1. Geometry of experiment.

housing. ²³ In addition, a 45° field of view limiter, a diffuser, and a Wratten filter were employed on the receiver. The purpose of the diffuser was to randomize the direction of the incoming light rays by scattering and thus to provide a spatially averaged effect. Figure 2 shows the apparatus along with the other electronic equipment.

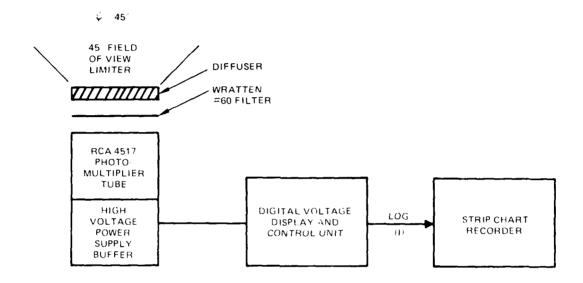


Figure 2. Experimental apparatus.

The 45° field of view limitation was used to occlude any stray light originating from city street lights or automotive headlights. Thus, the measurement was not one of irradiance in the strict sense of the definition which requires a 180° field of view. Therefore, a factor of 2 must be applied to all voltage measurements representing cloud attenuated lunar irradiance levels. This is the coefficient which appears in equation 5. Details of the derivation can be found in appendix A.

The detector's response was calibrated over the entire dynamic range of its operation using a standard lamp type P-101 Electro Optics Associates, and was found to be linear. This calibration was done in the laboratory with neutral density filters of varying strengths before the field experiments were begun.

Data acquisition in the field was accomplished by reading the digital voltage display on the control unit and simultaneously storing the base 10 log using a strip chart recorder. The time and laser position (fig 1) of each measurement were noted in order to concurrently correlate the results with those of the other experiments. The moon's angle of elevation was also monitored to the nearest degree.

^{23.} Smith, RC, An Underwater Spectral Irradiance Collector, J. of Marine Res., 27, 341, 1969.

DATA REDUCTION

The method of obtaining a transmission value consisted of recording the voltage, V_1 (which is proportional to irradiance, during conditions of cloud cover), with the axis of the detector pointed at the zenith (figure 1).

A standard reference voltage, $V_{_{\rm O}}(1)$ at a zenith angle of $\phi_{_{\rm R}}$ was recorded on 1 September 1979, when the moon was observed in a totally clear sky. The presence of clouds in the detector's field-of-view during a calibration measurement would cause scattered light, in addition to the direct moonlight beam, to enter the detector and thus would lead to an erroneously high value for the reference irradiance.

In order to use this reference value to calculate transmissions from irradiance data acquired on subsequent nights, it is necessary to correct it for changes in moon phase, moon zenith angle, and earth-moon distance. These corrections are summarized in equation (1).

$$V_{O}(N) = V_{O}(1) \frac{P(N)Z(\phi)D(N)}{P(1)Z(\phi_{R})D(1)}$$
 (1)

In equation (1) $V_O(N)$ is the voltage to be used as a reference on night N, where N is the day in the month of September in this case. $V_O(N)$ is proportional to the irradiance which would have been observed from the moon if the sky had been totally free of clouds. P(N) is a factor influencing the irradiance which depends upon the phase of the moon on a given night, N. P(N)=P(6)=1.0 for a full moon, which in this case occurred on 9/6/79. When no moon appears in the sky, P(N)=0. On the other nights, the lunar irradiance will be a fraction of that of the full moon, measurements of which are detailed elsewhere in the literature.

Two least square polynomial fits to these data are given by equations (2) and (3).

$$P_{1}(N) = 10.1787 - 1.5813 (N + 31) + 9.2956 \times 10^{-2} (N + 31)^{2}$$
$$-2.4618 \times 10^{-3} (N + 31)^{3} + 2.4894 \times 10^{-5} (N + 31)^{4}; \tag{2}$$

$$P_{2}(N) = -2.6579 \times 10^{3} + 2.6784 \times 10^{2} (N + 31) - 1.0052 \times 10^{1} (N + 31)^{2} + 1.6733 \times 10^{-1} (N + 31)^{3} - 1.0416 \times 10^{-3} (N + 31)^{2}$$
(3)

N is equal to the day in the month of September when a given experiment was performed. Equation (2) is valid when the moon is waxing, in this case between 9/1/79 and 9/6/79; whereas, equation (3) applies during the time period between 9/7/79 and 9/12/79, when the moon was waning.

 $Z(\phi)$ is proportional to the irradiance measured on a horizontal surface at a given zenith angle, ϕ . Because, to a very good first approximation, the spectral distribution of reflected light from the moon is equal to that emitted from the sum, solar data can be used for $Z(\phi)$ for applications where a ratio $Z(\phi_1)/Z(\phi_2)$ is implemented. $Z(\phi)$ is given by:

$$log(Z(\phi)) = 2.8685 + 1.9834 \left(\frac{\pi}{2} - \phi\right) - 1.0785 \left(\frac{\pi}{2} - \phi\right)^2$$

+ 1.7092 x
$$10^{-1} \left(\frac{\pi}{2} - \phi\right)^3$$
 + 1.2418 x $10^{-2} \left(\frac{\pi}{2} - \phi\right)^4$ (4)

and is most accurate for zenith angles between 0 and 47 degrees, with ϕ in units of radians. The data for which this expression is a fit were also taken from the literature. 21

D(N) expresses the change in illumination resulting from the variation in the earth/moon distance. At the lunar perigee, the moonlight is 0.26 times brighter than at the apogee. 22

The transmissions were obtained by normalizing the corrected voltage readings for the cloud experiments with the $V_{\rm c}(N)$ computed from equation (2).

$$T = \frac{2Vi}{V_{O}(N)} \tag{5}$$

where T = transmission. Values of t, the optical thickness, can then be computed using an equation due to van de Hulst 7 and later improved at NOSC to be more accurate at large zenith angles.

$$\tau = \frac{\Lambda(\phi_i)}{0.125T} - 11.36 \tag{6}$$

Here $(\cos \theta)$, the average cosine of the scattering angle, has been taken to be 0.875. ϕ is the zenith angle of the moon, in radians. (See appendix B.)

$$\Lambda(\phi_{i}) = 1.69 - .5513 \phi_{i} + 2.7173 \phi_{i}^{2} - 6.9866 \phi_{i}^{3} + 7.1446 \phi_{i}^{4}$$

$$- 3.4249 \phi_{i}^{5} + 0.6155 \phi_{i}^{6}$$
(7)

FINDINGS

The findings are in accordance with the preceding analysis. Transmission values are given in tables 1 through 5. The inferred values of τ for the reduced measurement data are listed in tables 6 through 10.

The values are tabulated by GTE Sylvania run number and position. The run number refers to the value assigned to a particular overflight of the aircraft containing the laser and is used as standard indicator for correlation between the various experiments conducted at Kauai. Laser position is that indicated in figure 1.

No reliable data were obtained during conditions of rain and clear sky, except for the reference. Some run numbers are therefore omitted when there were clouds in the sky surrounding a clear path between the moon and the detector. The data for these particular cases are not valid, for reasons mentioned in the previous section and have also been omitted.

Values of t, below 20, are probably not very accurate because those clouds we observed during the indicated time period were too thin to be adequately described by the van de Hulst equation, which operates in the diffusion regime. Although this is the case, values of optical thickness above 1 are listed for the purpose of comparing these results to numbers for T inferred from the data obtained in concurrent experiments.

The wide range of values obtained for the optical thicknesses in tables 6 through 10 reflects the wide variety of clouds observed over the test site. Similarly, the variation of optical thickness within a single run also reflects the rapidly changing and dynamic behavior of the clouds we encountered.

Measurements obtained when the moon was full, or near full, are more reliable than those acquired on nights with a lesser degree of lunar illumination.

There is a random error of about 5% on each value of the optical thickness. The background radiation from the night sky and stars was neglected, as were effects originating from changes in the absorption of the atmosphere from day to day. This is expected to be a fairly good assumption because there is not much atmosphere absorption in the spectral region of 530 nm. Also neglected was the very small change in moon phase over the course of one night's data acquisition. The cosine of the scattering angle was assumed to take the value of 0.875 (reference 7 and appendix B).

RECOMMENDATIONS

The results presented in tables 1 through 10 are for only one method of measurement transmission and optical thickness of clouds. To determine if this is an appropriate method of measuring integrated optical thickness of clouds, the results should be compared with other measurements and postulated theory for cloud optical thickness. Hence, the following recommendations are made.

- 1. Compare optical thickness values measured by this method to those obtained simultaneously from the Knollenberg particle size spectrometer during the blue-green laser cloud propagation experiments performed on Kauai, HI from 13 August through 21 September 1979. 2,3,4
- 2. Correlate the multipath time spread calculated from the inferred optical thicknesses of this method with those simultaneous pulse stretching results to be contained in the final report of the Downlink Laser Cloud Propagation Experiment. Several models for multipath time spreading (eg, references 2 and 5) currently exist for the comparison.
- 3. Compare pulse shapes predicted by Monte Carlo computer simulation calculations on photons transmitted through clouds to pulse shapes predicted by the present values of optical thickness and transmission.

Table 1. Cloud Transmission Values from Irradiance Measurements.

Data Acquisition Period: 9/5/79, 21:15 - 23:25

105

0.774 0.782 0.782 0.761 0.732 0.723 0.725 0.839 0.767 0.725 0.663 0.656 0.703 0.814 104 ; 0.950 22:20 103 38 0.986 0.914 0.822 0.774 0.698 22:02 E. Directly overhead F. 5 000 yards outbound G. 7 500 yards outbound H. 10 000 yards outbound J. 15 000 yards outbound 0.902 0.935 0.961 0.984 21:47 98 0.527 0.559 0.593 0.646 0.814 0.975 21:41 67 0.816 0.734 0.757 0.730 0.684 0.649 0.626 21:33 96 15 000 yards inbound 10 000 yards inbound 7 500 yards inbound 5 000 yards inbound 0. 992 0. 909 0. 861 0. 850 21:27 0.850 95 0.462 0.400 0.400 0.511 0.459 21:17 1 : 94 93 21:15 0.896 0.652 0.458 0.465 1 ; NOISSIMENART Sylvania Approximate Time (hr) KEY **4800wkgmっ** Laser Position

:

Table 2. Cloud Transmission Values from Irradiance Measurements.

	124	0,983	
	122	0.580 0.631 0.631 0.684 0.684 0.684 0.684	
	121	0.502 0.466 0.445 0.419 0.390 0.429 0.412	*Rain
	120*	0.176 0.188 0.207 0.233 0.282 0.327 0.353 0.372	
	119	0.524 0.553 0.561 0.552 0.529 0.510 0.496 0.468	Directly overhead 5 000 yards outbound 7 500 yards outbound 10 000 yards outbound 15 000 yards outbound
	118	0,639 0,589 0,587 0,543 0,609 0,588	E. Directly overhead F. 5 000 yards outbor G. 7 500 yards outbor H. 10 000 yards outbout J. 15 000 yards outbout
	117	0.531 0.557 0.619 0.758 0.882 0.985	m m c s = 5
79; 2:50	116	0,781	yards imbound yards imbound yards imbound yards imbound
4:19 - 9/7,	115	9.915	15 000 yards inbound 10 000 yards inbound 7 500 yards inbound 5 000 yards inbound
9/6/79; 2	41.	0,944	₹ . 000
riod:		NO1221M2NART	
Data Acquisition Period: 9/6/79; 24:19 - 9/7/79; 2:50	Sylvania	A A B B B B B B B B B B B B B B B B B B	KEY

Table 2. Cloud Transmission Values from Irradiance Measurements (continued).

Data Acquisition Period: 9/6/79; 24:19 - 9/7/79; 2:50

The second secon

0.689 0.779 0.969 0.724 0.561 2:41 0.936 2:27 . Directly overhead
. 5 000 yards outbound
. 7 500 yards outbound
. 10 000 yards outbound
. 15 000 yards outbound 0.949 2:0 0.991 0.903 0.909 0.919 0.884 130 0.264 0.289 0.304 0.316 0.341 0.385 0.409 1:55 000 yards inbound 000 yards inbound 500 yards inbound 000 yards inbound 0.770 0.741 0.728 0.833 0.787 0.658 0.645 0.645 1:48 0.714 1:41 127 10 7 7 5 126 **ને છ**ે ં ં 0.986 0.699 0.612 0.525 0.682 0.643 0.643 **TRANSMISSION** Sylvanta Approximate Time (hr) KEY 00mm0x7 Laser Position

Table 3. Cloud Transmission Values from Irradiance Measurements.

Data Acquisition Period: 9/7/79; 22:38 - 9/8/79; 1:17

151	0,654	23:35	
150	0.955 0.911 0.885 0.861 0.861	0.874	erhead s outbound is outbound s outbound
149	0.290 0.320 0.341 0.353 0.427 0.455	23:20	Directly overhead 5 000 yards outboo 7 500 yards outboo 10 000 yards outboo 15 000 yards outboo
148	0.409 0.448 0.465 0.465 0.473 0.412	0.338	m.e.e.z.
147	0.208 0.207 0.208 0.218 0.268 0.456	0.381	s inbound s inbound s inbound s inbound
143	0.328 0.316 0.318 0.326 0.487 0.515	0.573	15 000 yards 10 000 yards 7 500 yards 5 000 yards
142	0.390 0.391 0.396 0.414 0.425	22:38	4 8 0 0
	NOISSIMZNARI		
Sylvania Laser Run Position #	∢ ⊠∪∩ш⊩७:	J Approximate Time (hr)	KEY

Cloud Transmission Values from Irradiance Measurements (continued). Table 3.

160

5 000 yards outbound 7 500 yards outbound 10 000 yards outbound 15 000 yards outbound 0.629 0.600 0.570 0.519 0.489 0.487 Directly overhead 0.440 0.535 0.301 0.299 0.284 0.314 0.315 00:24 159 m.r.o.t. 0.831 0.759 0.795 0.994 00:18 158 1 1 15 000 yards inbound
10 000 yards inbound
7 500 yards inbound
5 000 yards inbound 9/7/79; 22:38 - 9/8/79; 1:17 000 yards inbound 0.920 0.766 0.758 24:00 155 23:53 1 1 154 0.951 4 & U O 0.882 0.532 0.666 0.945 0.481 0.392 23:41 152 Data Auquisition Period: NOISSIMSNAAT Sylvania Run Approximate Time (hr) KΕΥ ODULGIOPosition Laser

00:30

Table 3. Cloud Transmission Values from Irradiance Measurements (continued).

Data Acquisition Period: 9/7/79; 22:38 - 9/8/79; 1:17

162 163 165 166 167 168	0.403	:42 00:47 1:00 1:05 1:13	15 000 yards inbound E. Directly overhead 10 000 yards inbound 6. 7 500 yards outbound 7 500 yards outbound 8. 10 000 yards outbound 11 10 000 yards outbound 11 15 000 yards outbound
: !	403 390 371 342 340 348 365		yards yards yards yards
Sylvania Laser Run Position #	ФООШГΩТ-	Approximate Time (hr)	KEY

Table 4. Cloud Transmission Values from Irradiance Measurements.

Data Acquisition Period: 9/8/79; 23:40 - 9/9/79; 2:15

Sylvania Laser Run		171	172	173	174	175	176	177
POSICION T				710 0	0 604	0.442	0.773	0.697
ď		;	0.481	0.017	622	0.495	0.773	0,693
83		;	1 5	0.913	0.022	0.531	0,773	0.691
۰ د	NC	0.422	0.487	0.942	0.039		0.77.0	0.686
) C)19	0,426	0.486	;	0.663	0.5/1	765	0.682
) (SS	0.431	0.478	1	0.717	0.033	707	676
11 (ΙŅ	7044	0.463	;	0.740	0.688	0.720	0.070
LL.	ISI	0 1 1 0	500		0 755	0.709	0.708	0.07
9	 1A	0.458	0.400	;	357.0	0.730	0.679	0.670
בי	'Ы.	;	0.460	;	00/00	0.00	645	0.650
= -	L	0.467	0.461	1	0.766	0. /64	0.040	5
7								
Annrovimate		9/8/19			6	70.00	24.12	24:18
Time (hr)		23:40	23:46		23:58	70:47	24.12	
NBN		ď		s inbound	ui I	Directly overhead	overhead	_
- J		<u>6</u>	000		L. C	5 000 yar	ds outboun	
		، ن	7 500 yards	s inbound	š ±	10 000 var	yards outbound	_
		'n	3	_		15 000 yar	rds outboun	_

Table 4. Cloud Transmission Values from Irradiance Measurements (continued).

Data Acquisition Period: 9/8/79; 23:40 - 9/9/79; 2:15

1					1	<u> </u>	<u> </u>	~ .	_ 1	σ.	<u>ه</u> 1	1				
188	ł	;	;	; ;	0.841	0.836	0.0	0.6	0, 10	6/6/6	1:18					
183	0.885	0.923	0.93/	0.952	1	1	1	f 1			24:57		Directly overhead	as outbound	1s outbound 1s outbound	ds outbound
182	0.352	0.330	0,325	0.329	0.351	0,393	0.416	0.443	0.517		24:46		Directly ov	5 000 yard	10 000 yar	15 000 yar
181	0.480	0.472	0.468	0.465	0.464	0.465	0.466	0.466	0.464		24:44		انس	. (≖ و	· ~
180	0.876	0.811	0.784	0,750	0.704	0.668	0.651	0.636	0,617		24:38		inbound	inbound	inbound	ninoon i
179	;	0.989	0.964	0.948	0,936	1	;	;	0.989		24:31		15 000 yards	10 000 yards	7 500 yards inbound	o ooo yaras
178	0.458	0.440	0.439	0,443	0.468	0.527	0.564	0.610	0.695		24:25			œ æ	ه ئ	.
		٨	101	SS	SIN	121	1A <i>5</i>	11								
Sylvania Laser Run Position #	A	: œ	٠ <i>ـ</i>	. c	٠. ند	J LL	٠. د	, I	כר :		Approximate Time (hr)		KEY			

Cloud Transmission Values from Irradiance Measurements (continued). Table 4.

5 000 yards outbound 7 500 yards outbound 10 000 yards outbound 15 000 yards outbound 1:56 0.950 0.804 0.980 1111 Directly overhead 194 0.341 0.371 0.389 0.415 0.458 0.520 0.520 1:46 193 0.710 0.668 0.644 0.625 0.594 0.546 0.531 1:42 192 10 000 yards inbound 7 500 yards inbound 5 000 yards inbound 9/8/79; 23:40 - 9/9/79; 2:15 0.833 0.852 0.876 0.914 1:36 1 1 1 1 1 191 0.801 0.767 0.744 0.710 1:32 190 4 % J O 1:20 0.659 189 Data Acquisition Period: NOISSIMZNAAT Sylvania Approximate Time (hr) KΕΥ A B C D E L D I E T D Laser Position

0.924

197

2:12

Table 5. Cloud Transmission Values from Irradiance Measurements.

0.464 0.490 0.517 0.628 0.628 0.702 0.761 1:50 5 000 yards outbound 7 500 yards outbound 10 000 yards outbound 15 000 yards outbound 0.514 0.423 0.423 0.437 0.561 0.643 0.714 1:43 Directly overhead 207 0.520 0.526 0.526 0.526 0.526 0.534 0.534 1:37 ய்டீப்∺் 0.626 0.603 0.603 0.603 0.611 0.611 0.595 0.620 1:31 205 15 000 yards inbound 10 000 yards inbound 7 500 yards inbound 5 000 yards inbound 0.580 0.598 0.614 0.638 0.629 0.645 1:25 204 Data Acquisition Period: 9/12/79; 1:05 - 3:14 1:190.909 0.899 0.934 0.955 0.971 0.934 203 4 % J D 0.709 0.683 0.675 202 NOISZIMZNAAT Sylvanial Approximate Time (hr) KEY **ABOCHFOX** Laser

Table 5. Cloud Transmission Values from Irradiance Measurements (continued).

Data Acquisition Period: 9/12/79; 1:05 - 3:14

215	0.986	1	!	:	1	1	1	1	:	2:30	erhead s outbound s outbound s outbound s outbound
214	1	!	;	;	;	:	1	0.983	0,903	2:24	Directly overhead 5 000 yards outbound 7 500 yards outbound 10 000 yards outbound 15 000 yards outbound
212	0.905	0.889	0.961	0.970	;	1	:	;	;	2:12	m m o ± ¬
211	0.994	;	:	1	;	!	1	1	1	2:06	yards inbound yards inbound yards inbound yards inbound
210	0,649	0.709	0.750	0.821	;	1	;	;	1	2:00	15 000 yards 10 000 yards 7 500 yards 5 000 yards
209	0.620	0.569	0,552	0.463	0,393	0,349	0.349	0.343	0,343	1:55	A. 16 6. 10 0.
		N	I 0 I	SS	ΙW	ISN	Α۶	11			
Sylvania Laser Run Position #	A	œ	ı ()	0	u.	14.	٠	, I		Approximate Time (hr)	KEY

Table 6. Results of τ from Irradiance Measurements.

Data Acquisition Period: 9/5/76, 2:15 - 23:25

Sylvanial Laser Run Position #		93	94	96	76	100	104	105
	5	:		1.0	7.9	:	{	:
c 00	E Z	!	9.6	1,4	6.2	1	2.1	က . က .
ع د	N>	i	1	1.8	5.8	;	ຕຸຕ	3.2
ی د	101	١ ٢	5	2.3	4.4	1.6	4.2	3.2
۵ د	Ή.	•	12.7	~	1.1	2.4	5.6	3,6
υt	L .		12 8	7.7	; ;	3.9	5,8	4.2
ı. (JA:	o • o	16.0 7 F	v v	ļ	: :	4.7	4.4
. 5 :	OI.	o. v	٠,	• •	ı	5.2	2.5	4.3
T.	Ιd	;	;	o. *	1	. i	· ·	3,4
ņ	0	;	-	:	;		3	
Approximate Time (hr)		21:15	21:17	21:33	21:41	22:02	!	4
KE Y		¥ a	000			Directly ov 5 000 yard	Directly overhead 5 000 yards outbound	
		ໍ່ດໍ	7 500 yards 5 000 yards	s inbound s inbound	ນໍ່ ສ ໍ້	/ 500 yard 10 000 yard 15 000 yard	is outbound is outbound	

Table 7. Results of t from Irradiance Measurements.

Data Acquisition Period: 9/6/79, 24:19 - 9/7/79; 2:50

and the second second second second second second

1:18 9.4 9.4 8.8 8.1 7.2 7.2 7.2 7.2 7.2 i 13.8 15.8 17.1 18.8 21.0 18.1 19.3 1:02 59.9 55.4 49.4 42.7 33.3 27.1 24.3 22.5 20.0 ļ . Directly overhead
. \$ 000 yards outbound
. 7 \$00 yards outbound
. 10 000 yards outbound
. 15 000 yards outbound 12.5 111.2 10.9 111.3 12.3 13.4 13.8 15.3 ŀ 8.1 9.7 10.9 11.5 9.0 9.8 24:45 11.9 10.8 8.6 4.9 5 000 yards inbound 1 000 yards inbound 7 500 yards inbound 5 000 yards inbound 5.2 5.2 24:23 15 10 7 5 **₹** 8. ∵ 0 111411111 24:19 OPTICAL THICKNESS Sylvania Approximate Time (hr) ΚĒΥ Laser

Table 7. Results of r from Irradiance Measurements (continued).

Data Acquisition Period: 9/6/79, 24:19 - 9/7/79, 2:50

6.6 2:50 138 2:41 3.2 2:27 2.1 15.5 118.3 Directly overhead
5 000 yards outbound
7 500 yards outbound
10 000 yards outbound
15 000 yards outbound 2.0 2.5 2.5 3.0 2.9 2:04 36.9 32.7 30.5 28.9 25.9 21.7 19.7 18.7 15 000 yards inbound 10 000 yards inbound 7 500 yards inbound 5 000 yards inbound 1:48 1:41 127 9 | | | | | | | | | 4 જેંગ છે 1.6 6.9 9.5 12.9 7.3 8.5 9.3 126 OPTICAL THICKNESS Sylvania Approximate Time (hr) KEY Laser

Table 8. Results of ${\bf r}$ from Irradiance Measurements.

Data Acquisition Period: 9/7/79, 22:38 - 9/8/79, 1:17

151	;	5.4	:	;	i	;	;	;	;	23:35			
150	;	;	1.0	1.0	1.2	1.3	1.2	1.2	1.0	23:27	erhead	s outbound) yards outbound) yards outbound
149	25.	22.0	20.0	18.9	16.4	13.6	12.1	10.4	7.6	23:20)irectly ov	7 500 yard	10 000 yards outbook 15 000 yards outbook
148	14.1	11.9	11.0	11.0	10.6	12.1	13.9	15.6	19.5	23:15			
147	38.0	38.1	38.0	35.7	56.9	11.1	6.6	10.7	15.5	23:09	yards inbound	inbound	inbound
143	17.8	18.9	18,7	18.0	15.2	8.6	7.5	6. 8	2. 6	22:46	15 000 yards	200	00
142	!	12.7	;	12.8	12.4	11.3	10.7	10,3	0. 6	22:38	Α.α		
	SS	NE:	CK	ΙH	1	٦٨	'DI	Ιd	0				
Sylvania Laser Run Position #	V	α α	U	٥	ш	LL.	ŋ	Ι	Û	Approximate Time (hr)	KEY		

Table 8. Results of t from Irradiance Measurements (continued).

Data Acquisition Period: 9/7/79, 22:38 - 9/8/79, 1:17

	1 W W W O O A W D D E	0	head outbound outbound outbound
160	7.9 8.8 8.8 9.9 9.9 113.0 113.9 114.5	00:30	erhead s outb s outb s outb
159	15.9 11.1 28.5 28.7 30.9 26.8 27.6 26.8	00:24	Directly overhead 5 000 yards outbound 7 500 yards outbound 10 000 yards outbound 15 000 yards outbound
158	3.0	00:18	i i ė i i o
155	3.8	24:00	yards inbound yards inbound yards inbound yards inbound
154	1:00	23:53	15 000 yards i 10 000 yards i 7 500 yards i 5 000 yards
152	1.3 9.6 5.4 5.4 11.8	23:41	A.00.0
	OBLICAL THICKNESS		
Sylvania Laser Run Position	∢воошгатэ	Approximate Time (hr)	KEY

Table 8. Results of τ from Irradiance Measurements (continued).

Data Acquisition Period: 9/7/79, 22:38 9/8/79, 1:17

1	11	
19.6 20.5 19.6 18.1 12.6 5.5 5.2	1:17	
34.5 25.7 23.1 22.5 22.5 22.2 20.8 17.9	1:13	erhead s outbound is outbound is outbound is outbound
24.4 26.2 27.6 27.6 28.1 29.5 30.2 30.8 32.1 32.1	1:05	Directly overhead 5 000 yards outbook 7 500 yards outbook 10 000 yards outbook 15 000 yards o
20.9 19.5 18.8 17.9 16.2 14.9 14.5	1:00	
2.8	12:47	i nbound i nbound i nbound
19.4 20.4 22.0 24.9 25.1 24.2 22.6 20.9	00:42	15 000 yards 10 000 yards 7 500 yards 5 000 yards
31.9 27.9 27.5 27.0 31.0 26.4 25.6 50.0	00:37	
OPTICAL THICKNESS		
A B O O H F O T J	Approximate Time (hr)	KEY
	SS 31.9 20.9 24.4 34.5 SZ 27.9 19.4 19.5 26.2 25.7 SZ 27.0 22.0 2.8 17.9 28.1 22.5 HH 31.0 24.9 14.9 30.2 22.2 CAL 25.6 24.2 14.9 30.8 20.8 20.9 12.6 14.4 32.5 17.9	31.9 20.9 24.4 34.5 27.9 19.4 19.5 26.2 25.7 27.5 20.4 18.8 27.6 23.1 27.6 22.0 2.8 17.9 28.1 22.5 26.4 25.1 14.9 30.2 22.5 25.6 24.2 14.5 30.8 20.8 25.6 22.6 14.5 32.1 17.9 00.37 00.42 12.47 1:00 1:05 1:13

Table 9. Results of r from Irradiance Measurements.

Data Acquisition Period: 9/8/79, 23:40 9/9/79, 2:15

177	5.0 5.0 5.0 5.0 6.1	24:18	
176	2.7 2.2 2.9 2.9 3.6 5.7 5.5	24:12	Directly overhead 5 000 yards outbound 7 500 yards outbound 10 000 yards outbound 15 000 yards outbound
175	12.9 10.3 8.8 7.4 5.6 4.2 3.3	24:07	Directly ov 5 000 yard 7 500 yard 10 000 yard 15 000 yard
174	6.1 5.2 3.4 4.6 2.9 4.6 4.4	23:58	ញ់លំប្រភ
173	4		i nbound i nbound i nbound i nbound
172	9.9 9.6 9.7 10.0 10.9 11.0	23:46	15 000 yards 10 000 yards 7 500 yards 5 000 yards
171	12.5 12.3 12.0 11.1 10.6	9/8/79 23:40	A. D.
	OPTICAL THICKNESS		
Sylvania Laser Run Position #	K B O O H L G I 7	Approximate Time (hr)	KE Y

Table 9. Results of t from Irradiance Measurements (continued).

Data Acquisition Period: 9/8/79, 23:40 - 9/9/79, 2:15

179 180 181 182 183 188	1.8 12.9 22.1 2.1 2.8 13.3 24.4 1.5	13.5 24.8	5.0 13.7 22.2 3	5.9 13.7 18.6	6.3 13.6 16.9	6.7 13.6 15.2	7.3 13.7 11.4	24:31 24:38 24:44 24:46 24:57 1:18
178	13.1	14.2	12.6	6.6	8.5	7.0	4.8	24:25
vania Run #	SS	CKME	IH]	L -	IAC	11	.d0	_
Sylvar Laser R Position	A 8	υc	<i>9</i> ш	u.	5	I	J.	Approximate Time (hr)

E. Directly overhead F. 5 000 yards outbound G. 7 500 yards outbound H. 10 000 yards outbound J. 15 000 yards outbound A. 15 000 yards inbound B. 10 000 yards inbound C. 7 500 yards inbound D. 5 000 yards inbound KΕΥ

Table 9. Results of τ from Irradiance Measurements (continued).

Data Acquisition Period: 9/8/79, 23:40 - 9/9/79, 2:15

193 194 197	25.8 2.1 22.9 4.5 21.2 1.7 19.2 2.6 14.1 2.6 12.0 9.0	1:46 1:56 2:12 Directly overhead 5 000 yards outbound 7 500 yards outbound 10 000 yards outbound 15 000 yards outbound
192	6.4 7.5 8.2 8.8 9.8 11.3 11.8 12.3	1:42 E. Di F. 5 G. 7 H. 10
191	23.0	1:36 inbound inbound inbound
190	1. 4.2 4.2 4.9 6.2	1:32 1:36 15 000 yards inbound 10 000 yards inbound 7 500 yards inbound 5 000 yards inbound
189	3.4	1: 20 A. 15 B. 10 C. 7
	OPTICAL THICKNESS	
Sylvania Laser Run Position #	∢ B C D B F G T J	Approximate Time (hr) KEY

Results of $\boldsymbol{\tau}$ from Irradiance Measurements. Table 10.

4.3 5.7 6.3 9.7 13.4 116.5 117.0 1:55 1:50 7.0 10.9 10.2 5.4 3.3 3.3 1.8 207 1:43 206 1:37 1:31 9/12/79, 1:05 -3.9 3.7 3.1 2.7 2.7 1.6 1:25 1.1 202 Data Acquisition Period: OPTICAL THICKNESS Sylvania Approximate Time (hr) A B O O U U U U U Position Laser

2.6

5:00

5 000 yards outbound 7 500 yards outbound 0 000 yards outbound 5 000 yards outbound

Directly overhead 5 000 yards outbou 7 500 yards outbou 10 000 yards outbou 15 000 yards outbou

ui u' o' ± っ

inbound inbound

inbound inbound

000 yards i 000 yards i 500 yards i 000 yards i

15 10 7 5 A 8 0 0

KEY

210

REFERENCES

- Karp, S, A Test Plan for Determining the Feasibility of Optical Satellite Communications Through Clouds at Visible Frequencies, NOSC TN 279, 1 July 1978.
- Technical Advisor to the Strategic Blue-Green Optical Communications
 Program Joint Coordinating Committee, Naval Blue-Green Single Pulse Down-link Propagation Model, NOSC TR 387, Jan 1979.
- Technical Advisor to the Strategic Blue-Green Optical Communications
 Program Joint Coordinating Committee, Strategic Blue-Green Optical
 Communications Program Plan, NOSC Technical Document 269, 16 July 1979.
- 4. Hostetter, GR, Test Plan May 1, 1979 Downlink Laser Cloud Experiment, Contract #N00014-78-C-0716, GTE Sylvania, Inc.
- 5. Stotts, LR, Closed Form Expression for Optical Pulse Broadening in Multiple-Scattering Media, Applied Optics, 17, No. 4,504 (1978).
- 6. Dell-Imagine, RA, A Study of Multiple Scattering of Optical Radiation with Application to Laser Communications, in Advances in Communication Systems, vol II, edited by VA Balakrishnar (Academic, New York, 1966). p 1.
- 7. Danielson, RE, Moore, DR, and van de Hulst, HC, The Transfer of Visible Radiation Through Clouds, J. Atmosph. Sci., 26, 1078 (1969).
- 8. Mooradian, GC, Geller, M, Stotts, LB, Stephens, DH, and Krautwald, RA, Blue-Green Pulsed Propagation Through Fog, Applied Optics, 18, No. 4, pp 429-441 (1979).
- M.I.T. Technical Report No. 472, 22 November 1978 (unpublished).
- 10. Bravo-Zhivotovskiy, DM, Dolin, LS, Luchmin, AG, and Sarelyev, VA, Structure of a Narrow Light Bean in Sea Water, Atmospheric and Oceanic Physics, 5, No. 2, p 160-167 (1969) (translated by PA Kaehn).
- 11. Arnush, D, Underwater Light-Beam Propagation in the Small-Angle-Scattering Approximation, J. Opt. Soc. Am. 62, No. 9, 1109 (1972).
- 12. Fante, RL, Propagation of Electromagnetic Waves Through Turbulent Plasma Using Transport Theory, IEEE Trans Antenna Propagation, AP-21, pp 750-755 (1973).
- 13. Ishimaru, A, and Hong, ST, Multiple Scattering Effects on Coherent Bandwidth and Pulse Distortion of a Wave Propagating in a Random Distribution of Particles, Radio Sci. 10, 637 (1975).

- 14. Hong, ST, and Ishimaru, A, Two Frequency Mutual Coherence Function, Coherence Bandwidth, and Coherence Time of Millimeter and Optical Waves in Fain, Fog, and Turbulence, Radio Sci. 11, No. 6,501 (1976).
- 15. Stotts, LR, The Radiance Produced by Laser Radiation Traversing a Particulate Multiple-Scattering Medium, J. Opt. Soc. Am., 67, No. 6, p 815-19 (1977).
- 16. Ishimaru, A, Theory and Application of Wave Propagation and Scattering in Fandom Media, Proceedings of IEEE, 65, No. 7, p 1030-61 (1977).
- 17. Fried, DL, Propagation of the Mutual Coherence Function for an Infinite Plane Wave Through a Turbid Medium, Optics Letters, 1, No. 3, p 104-6 (1977).
- 19. Lutomirski, RF, Atmospheric Degradation of Electro-Optical System Performance, Applied Optics, 17, No. 24, p 3915-21 (1978).
- 10. Place, GN, and Kattawar, GU, Monte Carlo Calculations of Light Scattering from Clouds, Applied Optics, 7, No. 3, p 415-19 (1968).
- 20. Rucher, EA, Propagation Models for Optical Communications Through Fog and Clouds, Proceedings of the National Flectronic Conference, vol 29, p 180-185 (1974).
- 21. Riberman, LM, Dunkelman, L, Fickett, MI, and Finke, RG, Levels of Nocturnal Illumination, Appendix by D. P. F. Brown, Institute for Defense Analysis Research, copy 109/200, Contract SO-50, Task T-36.
- 22. Bond, DS, and Henderson, FP, The Conquest of Darkness, AD 346297, Defense Documentation Center, Alexandría, VA, July 1963.
- 23. Smith, PC, An Underwater Spectral Irradiance Collector, J. of Marine Pes., 27, 341. 1969.

APPENDIX A

CORRECTION FOR USING A 45° ANGLE FIELD OF VIEW LIMITER WITH A LAMBERTIAN RECEIVER.

In the case of measurements with clouds, the irradiance intensity incident upon the horizontal surface of the collector is peaked along the vertical direction with a cos θ dependence for the intensity of light rays whose orientation differs from the zenith by an angle of θ .

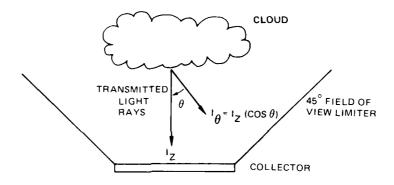


Figure A-1.

The total amount of integrated intensity, I($\theta_{\rm L}$) received at the collector is proportional to:

$$I (\theta_{L}) \alpha \int_{0}^{2\pi} \int_{0}^{\theta_{L}} \cos \theta \sin \theta d\theta d\phi$$
 (A-1)

The solid angle is accounted for by the integration over sin θ d θ d ϕ , where ϕ is the azimuthal angle, θ_L is the angle of the field of view limiter when measured from the normal.

Note that it is not necessary to normalize the irradiance measurements because a ratio between $I(\pi/2)$ and $I(\pi/4)$ would cause any factors common to both to cancel out. However, a constant of proportionality equal to $1/\pi$ is appropriate in order for the integrated irradiance value to equal 1 in the case when no field of view limiter is present.

$$I \left(\frac{\pi}{2}\right) = \frac{1}{\pi} \int_{0}^{2\pi} \int_{0}^{\frac{\pi}{2}} \cos \theta \sin \theta \, dA \, d\phi = 1 \tag{A-2}$$

The cloud is assumed to subtend the field of view in this analysis although, in the experimental case, the irradiance values obtained represent an average of the sky over the field of view.

Next, we evaluate the integral in (A-1) for the unobstructed case, with θ_L = $\pi/2$ and then for the experimental case when θ_L = $\pi/4$.

I
$$(\theta_L)$$
 α 2π $\int_0^{\theta_L} \cos \theta \sin \theta d\theta$ (A-3)

$$\int \cos \theta \sin \theta d\theta = \frac{\sin^2 \theta}{2} \tag{A-4}$$

Therefore:

$$I \left(\frac{\pi}{2}\right) = \pi \tag{A-5}$$

and

$$I(\frac{\pi}{4}) = 0.500 \pi$$
 (A-6)

$$\frac{I(\frac{\pi}{2})}{I(\frac{\pi}{4})} = 2 \tag{A-7}$$

Thus the 45° field of view limiter is seen to occlude half of the light transmitted through the clouds and, as a result, a factor of 2 is obtained for correcting the experimental voltage data (which are proportional to irradiance).

APPENDIX B

LBS:sd Ser 811/24 22 January 1979

MEMORANDUM

From: Code 8114 To: SETC File Via: Code 811

Subj: Zenith Angle Dependence of Thick Cloud Transmittance

Ref: (a) L. B. Stotts, "Technical Comments on the Single Pulse Downlink Propagation Model Portion at the Third Interim OSCAR Report," NOSC MEMO Ser 811/560, dtd 2 January 1979.

- (b) R. E. Danielson, D. K. Moore and H. C. van de Hulst, "The Transfer of Visible Radiation Through Clouds," J. Atmos. Sci., 26, No. 9, pp. 1078–87 (1969).
- (c) E. A. Bucher, "Computer Simulation of Light Pulse Propagation for Communications Through Thick Clouds," <u>Applied Optics</u>, 12, No. 10, pp. 2391–2400 (1973).
- (d) F. A. Graybill, An Introduction to Linear Statistical Models, McGraw-Hill, New York, 1961, Volume 1.
- 1. The purpose of this memorandum is to propose a new functional dependence on zenith angle for thick cloud transmittance. In particular, the author proposes that the thick cloud transmittance in the Navy Single Downlink Propagation Model be given by

$$\tau_{\rm c} \propto {\rm A} \left(\varphi_{\rm c} \right)$$
 (1)

where

$$\mathbf{A}(\varphi_{\mathbf{S}}) = \sum_{j=0}^{6} a_{j} \varphi_{\mathbf{S}}^{j}$$

$$a_0 = 1.69$$

$$a_1 = -0.5513$$

$$a_2 = 2.7173$$

$$a_3 = -6.9866$$

$$a_4 = 7.1445$$

$$a_5 = -3.4249$$

$$a_6 = 0.6155$$

rather than by $\tau_c \alpha (\cos \varphi_s)^{0.5}$ (ref (a)).

2. The zenith angle dependence of thick cloud transmittance has been modeled by Danielson et al (ref (b)) using radiative transfer techniques and reconfirmed by Bucher (ref (c)) using Monte Carlo simulation.

It was noted in reference (a) that the $(\cos \varphi_8)^{0.5}$ dependence for cloud transmittance now used in the Navy Downlink Propagation Model breaks down for zenith angles greater than 84°. Using a triangular factorization (least-square fit; ref (d)) of the X'X matrix composed of the tabular results given in reference (b), the author obtained the following polynomial expression for the zenith angle dependence of thick cloud transmittance:

$$\mathbf{A}(\varphi_{\mathbf{S}}) = \sum_{j=0}^{6} \mathbf{a}_{j} \varphi_{\mathbf{S}}^{j}$$
 (3)

with

$$a_0 = 1.69$$
 $a_1 = -0.5513$
 $a_2 = 2.7173$
 $a_3 = -6.9866$
 $a_4 = 7.1445$
 $a_5 = -3.4249$
 $a_6 = 0.6155$

Figure B-1 is a plot of $A(\varphi_8)$ and the van de Hulst Bucher results as a function of incident zenith angle. It is apparent that $A(\varphi_8)$ is a good approximation of the van de Hulst/Bucher results over the range between 0° and 90° . It is recommended that this expression be adopted in the Navy Single Pulse Downlink Propagation Model.

3. Any questions on the above should be directed to L. B. Stotts, Code 8114, N6858.

L. B. STOTTS

Copies to:

811

81R

8105 (K. Kelley)

8114 (G. C. Mooradian, R. D. Anderson, M. Geller, D. H. Stephens)

532 (J. Richter, H. G. Hughes)

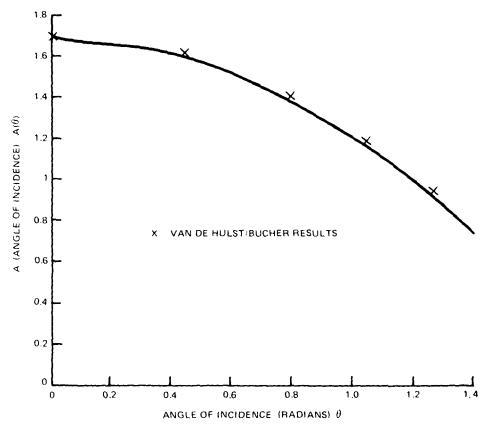


Figure B-1. Zenith angle dependence of thick cloud transmittance.

INITIAL DISTRIBUTION

DEFENSE ADVANCED RESEARCH PROJECTS AGENCY STO (DR. T. WIENER) DR. S. KARP

OFFICE OF NAVAL RESEARCH EASTERN/CENTRAL REGIONAL OFFICE DR. M. B. WHITE

HSS, INC. 2 ALFRED CIRCLE BEDFORD, MA 01730 DR. D. HANSEN

DEFENSE TECHNICAL INFORMATION CENTER

(12)